


OPENVIEW BI-FOLD DOORS



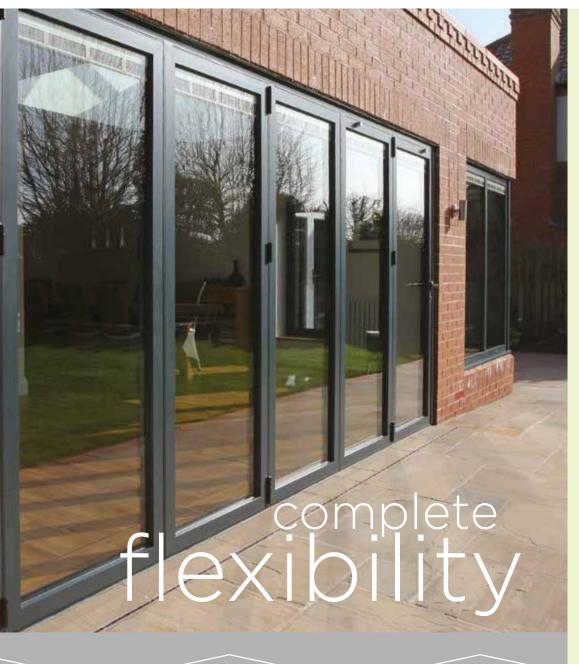

So much more than your average Bi-Fold Door!

Outstanding thermal efficiency, super smooth sliding mechanisms and frames manufactured to the highest quality, makes Openview ideally suited to all applications.

Our specialised thermal break framing and energy efficient glass keeps room temperatures consistent and energy bills lower. If your looking for stunning looks with superior quality, then Openview is your perfect choice.



GUARANTEED TO LASTSupported by our 10-year

Supported by our 10-year guarantee. Tested to BS6375 2015 and PAS 24 accredited for security







ultimate performance

intelligent design across multiple applications

Designed to be used in a wide range of domestic and commercial applications, Openview offers outstanding adaptability, making this a perfect choice in almost any application. Adept features like inward and outward opening doors utilising common profiles, allows for easier planning and installation. The choice of low level or weather resistant high level thresholds with integrated security locking mechanisms establish

Openview as one of the most flexible

Bi-Fold door systems on the market.

GLAZING

Openview doors are designed for 28mm double glazed or 36mm and 44mm triple glazing units are possible with bead and gasket changes.

POWDER COATING

Polyester powder coating to BS/EN 12206-1:2004. 40 microns minimum thickness.

ALUMINIUM EXTRUSION

Aluminium alloy 6063 T5/T6 to BS/EN12020-2:2008. Extruded surface anodising quality.

ANODISING Anodis go attings in patrup.

GASKETRY

EPDM rubber to BS7412:2007, BS4255-1:1986. 70 SHORE A.

WEATHERPILES

Nylon or PVC backed fin-pile and wool-pile draught seals to BS7386:1997. Anodic coatings in natural colours. Anodising to BS3987:1991.AA25

ADJUSTABLE JAMB

SYSTEM supplied as standard! Great tool for onsite installation/adjustment.

quality
you can trust...



MANUFACTURE & DELIVERY

Fast, meticulous fabrication delivered on time



U-VALUES:

Standard Double Glazing 1.7W/m²k 36mm Triple Glazing 1.5 W/m²k 44mm Triple Glazing 1.4 W/m²k



flexible configuration without compromise

Openview offers a Bi-fold system that is truly flexible. With the choice of inward or outward opening doors, bespoke configurations, high and low level thresholds, minimal profiles and a large selection of finishing colours allows you to design your perfect glass window wall to almost any size.





SCALABILITY

Max Height of 3 metre and max sash width of 1.2 metre. This outperforms most systems on the market



CONFIGURATIONS

Options for doors to open in or out with the availability of low thresholds for internal room dividers



OPENVIEW SIGHT LINES

Minimal profiling makes for a modern look that brings the outside in!




COMPLIMENTARY COLOURS

Large range of colour choices designed to compliment your property style



FULLY BESPOKE


Large range of colour coordinated handles and accessories to create that perfect look

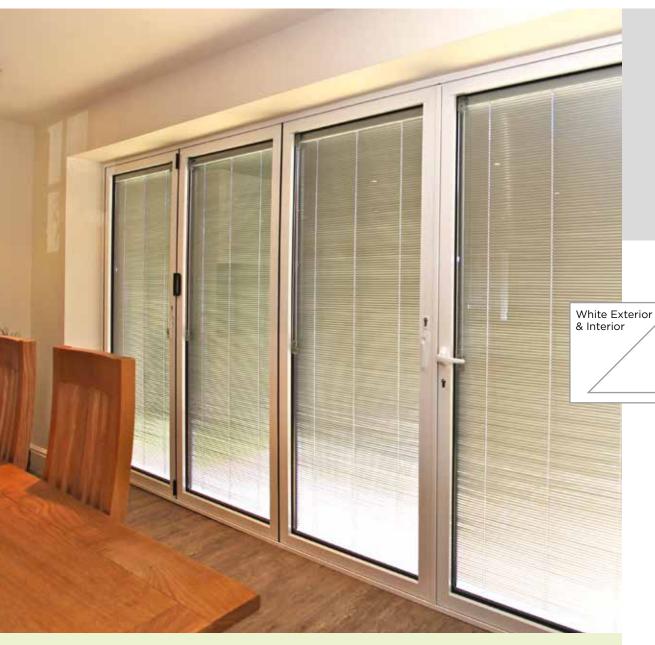

colour options & hardware

Openview frames are available in a wide choice of classic and contemporary colours, which have been configured to match seamlessly with our range of high class handles and accessories.

frame colour options









hardware colour options















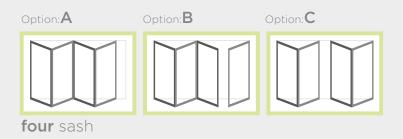

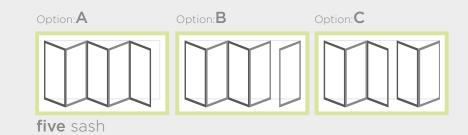

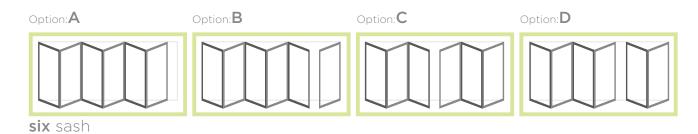

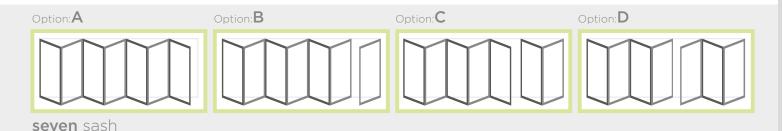

IMPORTANT INFORMATION:

- The maximum number of sashes recommended going one way is 7. This is because of the amount of force needed to fully open 7 fully glazed sashes.
- The width and height of doors are always subject to site conditions allowing for wind loads, locations and use.

